

Work Order ID 50729

July 21, 2009 12:42:32 PM



Page 1

Item ID: D3684-047

Accept



Setup Start



Revision ID: C

Stop



Item Name: FWD LEG ASS'Y

Start Date: 7/15/09 Start Qty: 5.00

Cust Item ID:

Required Date: 7/15/09 Req'd Qty: 5.00

Customer:

Reference:

Approvals:

Process Plan:

Date:

Tooling:

Date:

Run Start



QC:

Date:

SPC (Y/N):

Date:

Stop



Sequence ID/
Work Center ID

Operation
Description

Set Up/
Run Hours

Draw
Number

Draw
Rev.

Plan
Code

Accept
Qty

Reject
Qty

Reject
Number

Insp.
Stamp

Draw Nbr

Revision Nbr

D3684

Rev C

100

Pick Kit

0.00



Packaging

Memo

0.00

Packaging

SAD 09-08-05

110

Small Fab

0.00



Small Fab

Memo

0.00

Small Fab

1-Use anti-seize compound Tectly 502c Class I, Mil-PRF-16173E or equivalent on thread and assemble as per dwg D3684. 2-Assemble D3693-1 & D3691-1 Using Sikaflex -241/-291 between mating surfaces as per Dwg D3684. ***Ensure holes for AN3C Bolts are free of

SAD 09-08-05

PPL 09.08.05

P10

120

QC5- Inspect part completeness to step on W/O

0.00



QC



Memo

0.00

Quality Control

=> S 09/08/05

45

W/O:		WORK ORDER CHANGES					
DATE	STEP	PROCEDURE CHANGE	By	Date	Qty	Approval Chief Eng / Prod Mgr	Approval QC Inspector
09-08-05	110	Add the NASS09-12C to the I.P.P per Chng. <u>B# M110844</u> Qty 1 Each perm change	08-08-05 E	08-08-05 07.08.10	5		

Part No: _____ PAR #: _____ Fault Category: _____ NCR: Yes No DQA: _____ Date: _____

Resolution: _____ Disposition: _____ QA: N/C Closed: _____ Date: _____

NCR:		WORK ORDER NON-CONFORMANCE (NCR)						
DATE	STEP	Description of NC Section A	Corrective Action Section B			Verification Section C	Approval Chief Eng	Approval QC Inspector
			Initial Chief Eng	Action Description Chief Eng	Sign & Date			

NOTE: Date & initial all entries

Work Order ID 50729

July 21, 2009 12:42:32 PM

Page 2

Item ID: D3684-047
Revision ID: C
Item Name: FWD LEG ASS'Y

Accept

Setup Start

Stop

Start Date: 7/15/09 Start Qty: 5.00

Required Date: 7/15/09 Req'd Qty: 5.00

Cust Item ID:

Customer:

Reference:

Approvals:

Process Plan:

Date:

Tooling:

Date:

Run Start

Stop

QC:

Date:

SPC (Y/N):

Date:

Sequence ID/
Work Center ID

Operation
Description

Set Up/
Run Hours

Draw
Number

Draw
Rev.

Plan
Code

Accept
Qty

Reject
Qty

Reject
Number

Insp.
Stamp

130

Identify as per dwg & Stock Location: 139A

0.00



Packaging

Memo

0.00

Packaging

140

QC21- Final Inspection - Work Order Release

0.00



QC

Memo

0.00

Quality Control

9/8/06 (5x) SP

MF 09-08-06 090810

W/O:		WORK ORDER CHANGES					
DATE	STEP	PROCEDURE CHANGE	By	Date	Qty	Approval Chief Eng / Prod Mgr	Approval QC Inspector

Part No: _____ PAR #: _____ Fault Category: _____ NCR: Yes No DQA: _____ Date: _____

Resolution: _____ Disposition: _____ QA: N/C Closed: _____ Date: _____

NCR:		WORK ORDER NON-CONFORMANCE (NCR)						
DATE	STEP	Description of NC Section A	Corrective Action Section B			Verification Section C	Approval Chief Eng	Approval QC Inspector
			Initial Chief Eng	Action Description Chief Eng	Sign & Date			

NOTE: Date & initial all entries

Picklist Print

July 21, 2009 12:42:32 PM

Work Order ID: 50729

Parent Item: D3684-047RevC

Parent Item Name: FWD LEG ASS'Y



Comments:

Start Date: 7/15/09

Required Date: 7/15/09

Start Qty: 5.00

Required Qty: 5.00

Component Item ID/ Item Name	Replacement Item ID	Mfg/ Purch	Bin Item	Primary Location	Last Location	Route Seq ID	Unit of Measure	Qty on Hand	Remaining Qty To Pick	Qty Issued	Date Issued	Status
AN3C12A		Purchased	No			110	Each	135.0000	10.0000			
												
Bolts										SAD	09-08-05	

<u>Warehouse</u>	<u>Loc Qty</u>	<u>Loc Code</u>
<u>Location</u>		
Main Warehouse		
ST	135	
106993	7	
110155	2	
110552	4	
110584 x4	72	
111916	50	

D3688-1RevB

Manufactured No

110

Each

8.0000

5.0000



STUD



SAD 09-08-05

<u>Warehouse</u>	<u>Loc Qty</u>	<u>Loc Code</u>
<u>Location</u>		
Main Warehouse		
ST	8	
45670	8	

D3689-1RevB

Manufactured No

110

Each

19.0000

5.0000



SLEEVE



SAD 09-08-05

<u>Warehouse</u>	<u>Loc Qty</u>	<u>Loc Code</u>
<u>Location</u>		
Main Warehouse		
ST	19	
46051	19	

W/O:		WORK ORDER CHANGES					
DATE	STEP	PROCEDURE CHANGE	By	Date	Qty	Approval Chief Eng / Prod Mgr	Approval QC Inspector

Part No: _____ PAR #: _____ Fault Category: _____ NCR: Yes No DQA: _____ Date: _____
 Resolution: _____ Disposition: _____ QA: N/C Closed: _____ Date: _____

NCR:		WORK ORDER NON-CONFORMANCE (NCR)						
DATE	STEP	Description of NC Section A	Corrective Action Section B			Verification Section C	Approval Chief Eng	Approval QC Inspector
			Initial Chief Eng	Action Description Chief Eng	Sign & Date			

NOTE: Date & initial all entries

Picklist Print

July 21, 2009 12:42:32 PM

Page 2 / 3

Work Order ID: 50729

Parent Item: D3684-047RevC

Parent Item Name: FWD LEG ASS'Y

Comments:

Start Date: 7/15/09

Required Date: 7/15/09

Start Qty: 5.00

Required Qty: 5.00

Component Item ID/ Item Name	Replacement Item ID	Mfg/ Purch	Bin Item	Primary Location	Last Location	Route Seq ID	Unit of Measure	Qty on Hand	Remaining Qty To Pick	Qty Issued	Date Issued	Status
---------------------------------	------------------------	---------------	-------------	---------------------	------------------	-----------------	--------------------	----------------	--------------------------	---------------	----------------	--------

D3691-1RevU/R *Rev-B* Manufactured

No

110

Each

17.0000

5.0000



STUD *MP 01/08/10*

SAD 09-08-05

Warehouse

Loc Qty

Loc Code

Location

Main Warehouse

ST

17

46052

17

D3692-1RevB

Manufactured

No

110

Each

106.0000

20.0000



SPACER

SAD 09-08-05

Warehouse

Loc Qty

Loc Code

Location

Main Warehouse

ST

106

44827

68

45672

38

D3693-1RevU/R *Rev-B*

Manufactured

No

110

Each

5.0000

5.0000



Rod End Bearing

** MP 01/06/10*

SAD SAD 09-08-05

Warehouse

Loc Qty

Loc Code

Location

Main Warehouse

ST

5

45723

5

850733 x 5

12

3

July 21, 2009 12:42:32 PM

Shop Packet Print

Page 2

W/O:		WORK ORDER CHANGES					
DATE	STEP	PROCEDURE CHANGE	By	Date	Qty	Approval Chief Eng / Prod Mgr	Approval QC Inspector

Part No: _____ PAR #: _____ Fault Category: _____ NCR: Yes No DQA: _____ Date: _____

Resolution: _____ Disposition: _____ QA: N/C Closed: _____ Date: _____

NCR:		WORK ORDER NON-CONFORMANCE (NCR)						
DATE	STEP	Description of NC Section A	Corrective Action Section B			Verification Section C	Approval Chief Eng	Approval QC Inspector
			Initial Chief Eng	Action Description Chief Eng	Sign & Date			

NOTE: Date & initial all entries

Picklist Print

July 21, 2009 12:42:32 PM

Page 3 / 3

Work Order ID: 50729

Parent Item: D3684-047RevC

Parent Item Name: FWD LEG ASS'Y

Comments:

Start Date: 7/15/09

Required Date: 7/15/09

Start Qty: 5.00

Required Qty: 5.00

Component Item ID/ Item Name	Replacement Item ID	Mfg/ Purch	Bin Item	Primary Location	Last Location	Route Seq ID	Unit of Measure	Qty on Hand	Remaining Qty To Pick	Qty Issued	Date Issued	Status
MS21043-3		Purchased	No			110	Each	590.0000	10.0000			



Nut

SAD 09-08-05

Warehouse Loc Qty Loc Code

Location

OFFSHORE

FG

80

103691

80

Main Warehouse

ST

510

111819 x4

210

112243

300

10

NAS509L12C

Purchased

No

110

Each

35.0000

5.0000



Nuts

SAD 09-08-05

Warehouse Loc Qty Loc Code

Location

Main Warehouse

ST

35

106993

5

110844

30

5

See #10
110

July 21, 2009 12:42:32 PM

Shop Packet Print

Page 3

W/O:		WORK ORDER CHANGES					
DATE	STEP	PROCEDURE CHANGE	By	Date	Qty	Approval Chief Eng / Prod Mgr	Approval QC Inspector


Part No: _____ PAR #: _____ Fault Category: _____ NCR: Yes No DQA: _____ Date: _____

Resolution: _____ Disposition: _____ QA: N/C Closed: _____ Date: _____

NCR:		WORK ORDER NON-CONFORMANCE (NCR)						
DATE	STEP	Description of NC Section A	Corrective Action Section B			Verification Section C	Approval Chief Eng	Approval QC Inspector
			Initial Chief Eng	Action Description Chief Eng	Sign & Date			

NOTE: Date & initial all entries


ITEM	QTY -041	PART NUMBER	DESCRIPTION
1	X	D3684-041	TRIPOD MOUNT ASSEMBLY
2	1	D3684-043	MOUNT ASSEMBLY
3	1	D3684-045	INBOARD LEG ASSEMBLY
4	4	D3692-1	SPACER
5	2	AN3C-12A	BOLT
6	2	MS21043-3	NUT

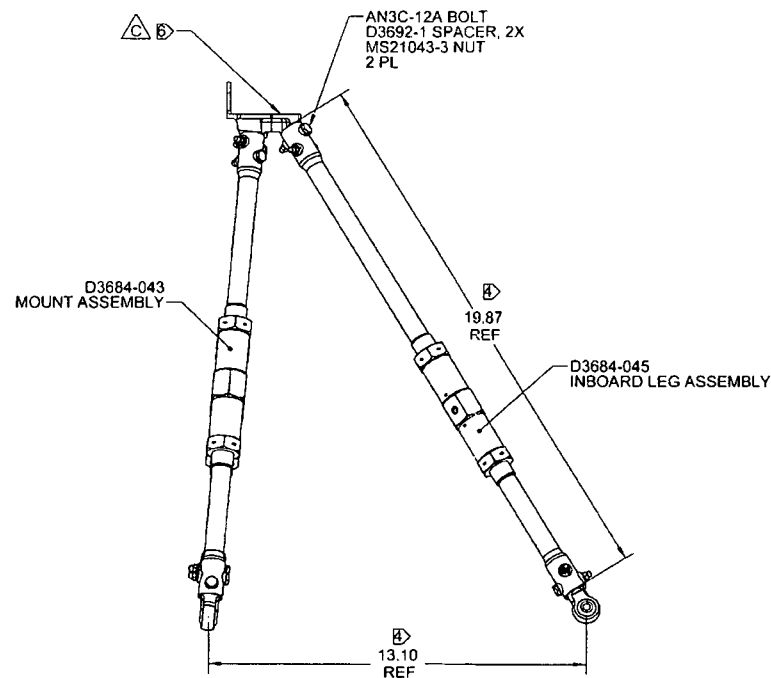

D3684-041 TRIPOD MOUNT ASSY

NOTES:

- 1) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED
- 2) UNITS: INCHES UNLESS OTHERWISE NOTED
- 3) IDENTIFICATION: NONE
- 4) DIMENSIONS SHOWN ARE WHEN D3688-1/-3/-5 & D3691-1 STUDS ARE FULLY THREADED INTO D3689-1 SLEEVES
- 5) WEIGHT: 9.9 lbs
- 6) ASSEMBLE D3684-045 WITH D3684-043 USING SIKAFLEX-241/-291 OR PROSEAL 890 OR MIL-S-8802 CLASS 'B2' SEALANT BETWEEN MATING SURFACES. ENSURE HOLES FOR AN3C BOLTS ARE CLEAR OF SEALANT
- 7) ASSEMBLY SHOWN FOR REF ONLY, -041 IS PACKAGED UNASSEMBLED


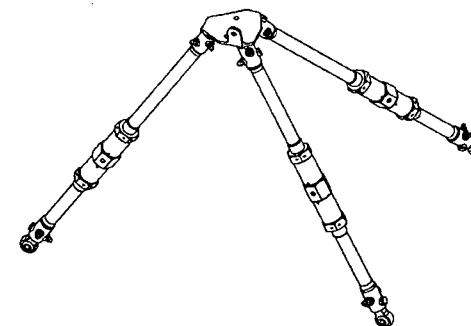


W/O 50729

RELEASED
08/12/12

C	NOW ASSEMBLED USING SEALANT (ZN A8-1, D6-1, A8-2, D4-2, A8-3, B4-3, A8-4, B4-4, A8-5, B5-5); ASSEMBLY NOW SHOWN FOR REF ONLY (ZN A8-1, A4-1)	RF	08.12.15
B	19.52 WAS 19.50 (ZN C6-2); 9.20 WAS 9.70 (ZN C6-2); 20.74 WAS 21.24 (ZN C6-4); 6.85 WAS 6.88 (ZNDS-5); MODIFIED PER PROTOTYPE INSTALLATION; REFORMATTED TO CURRENT DWG STANDARDS	RF	08.11.24
A	NEW ISSUE	RF	08.05.22
REV.	DESCRIPTION	BY	DATE
DESIGN	RF	DART AEROSPACE LTD HAWKESBURY, ONTARIO, CANADA	
DRAWN	RF		
CHECKED		DRAWING NO.	REV. C
MFG. APPR.		D3684	SHEET 1 OF 5
APPROVED		TITLE	SCALE
DE APPR.		TRIPOD MOUNT ASSY	NTS
DATE	08.12.15	COPYRIGHT © 2008 BY DART AEROSPACE LTD THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD	

ITEM	QTY -043	PART NUMBER	DESCRIPTION
1	X	D3684-043	MOUNT ASSEMBLY
2	1	D3687-1	MOUNT
3	1	D3684-047	FWD LEG ASSY
4	1	D3684-049	AFT LEG ASSY
5	8	D3692-1	SPACER
6	4	AN3C-12A	BOLT
7	4	MS21043-3	NUT

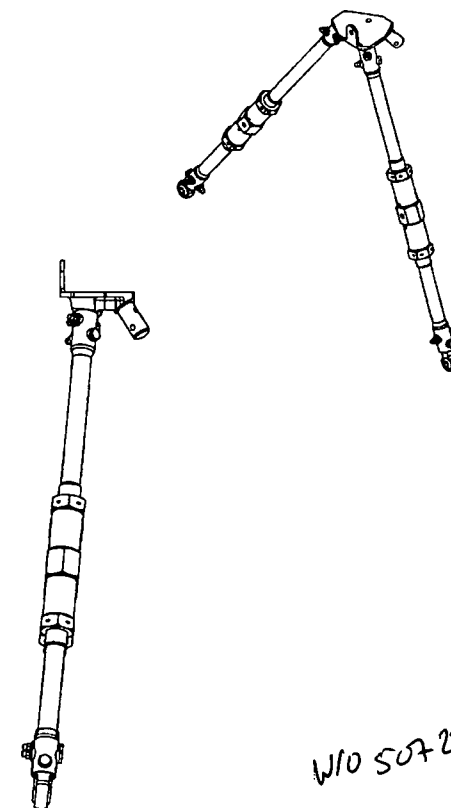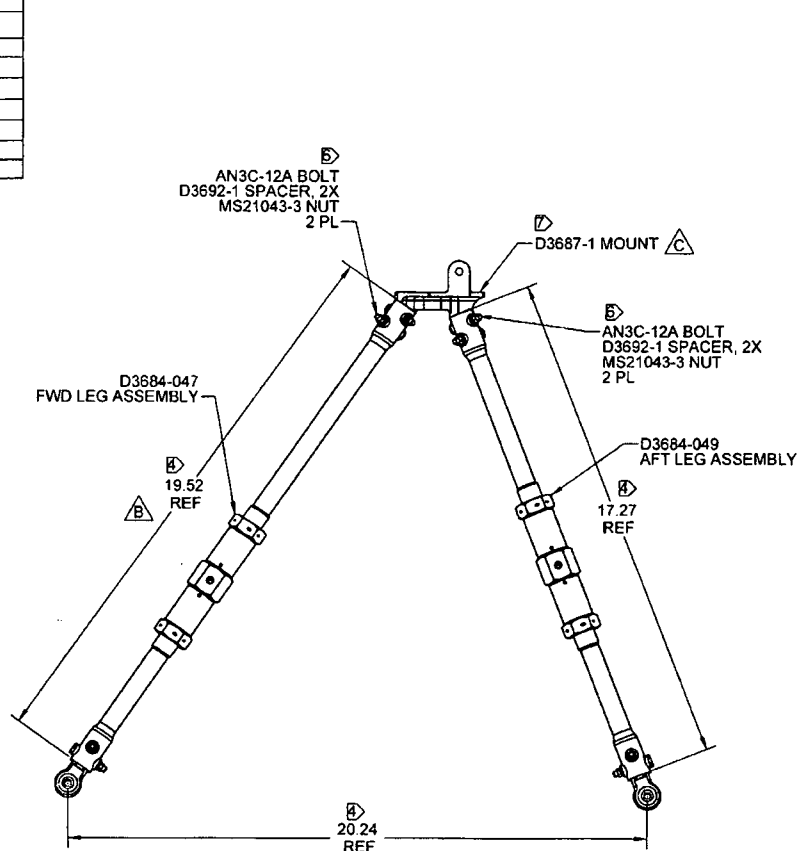

D3684-043 MOUNT ASSEMBLY

NOTES:


- 1) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED
- 2) UNITS: INCHES UNLESS OTHERWISE NOTED
- 3) IDENTIFICATION: IDENTIFY WITH DART ASSEMBLY P/N D3684-043 USING FINE POINT PERMANENT INK MARKER
- 4) DIMENSIONS SHOWN ARE WHEN D3688-1/3 & D3691-1 STUDS ARE FULLY THREADED INTO D3689-1 SLEEVES
- 5) WEIGHT: 6.6 lbs
- 6) TORQUE FASTENERS TO 20-25 in-lbs
- 7) ASSEMBLE D3684-047 & D3684-049 WITH D3687-1 USING SIKAFLEX-241/291 OR PROSEAL 890 OR MIL-S-8802 CLASS 'B2' SEALANT BETWEEN MATING SURFACES. ENSURE HOLES FOR AN3C BOLTS ARE CLEAR OF SEALANT

DESIGN	RF	DART AEROSPACE LTD	
DRAWN	RF	HAWKESBURY, ONTARIO, CANADA	
CHECKED	RF	DRAWING NO.	REV. C
MFG. APPR.	RF	D3684	SHEET 2 OF 5
APPROVED	RF	TITLE	SCALE
DE APPR.	RF	TRIPOD MOUNT ASSY	NTS
DATE	08.12.15	COPYRIGHT © 2008 BY DART AEROSPACE LTD	

RELEASED
12/01/12

W10 50729

ITEM	QTY -045	PART NUMBER	DESCRIPTION
1	X	D3684-045	INBOARD LEG ASSEMBLY
2	1	D3688-5	STUD
3	1	D3689-1	SLEEVE
4	1	D3691-1	STUD
5	4	D3692-1	SPACER
6	1	D3693-1	ROD END BEARING
7	2	AN3C-12A	BOLT
8	2	MS21043-3	NUT
9	1	NAS509L-12C	NUT
10	1	NAS509-12C	NUT

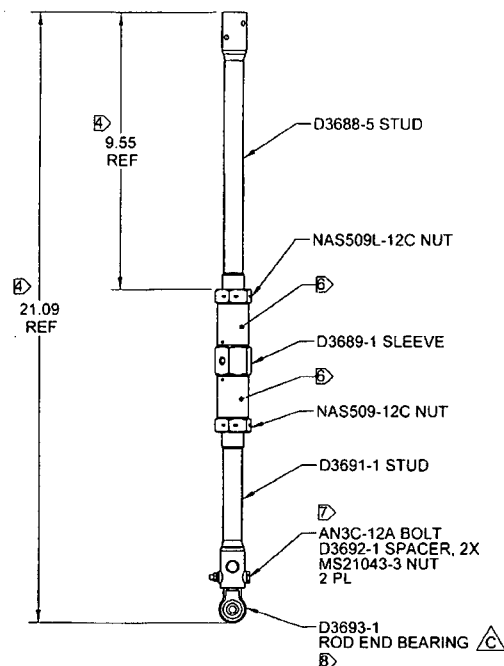

D3684-045 INBOARD LEG ASSEMBLY

W/D 50729


RELEASED
09/01/12 MB

NOTES:

- 1) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED
- 2) UNITS: INCHES UNLESS OTHERWISE NOTED
- 3) IDENTIFICATION: IDENTIFY WITH DART ASSEMBLY P/N D3684-045 USING FINE POINT PERMANENT INK MARKER
- 4) DIMENSION SHOWN IS WHEN D3688-5 & D3691-1 STUDS ARE FULLY THREADED INTO D3689-1 SLEEVE
- 5) WEIGHT: 3.1 lbs
- 6) USE TECTYL 502C CLASS I, MIL-PRF-16173E GRADE 2 OR EQUIVALENT ANTI-SEIZE COMPOUND ON THREAD
- 7) TORQUE FASTENERS TO 20-25 in-lbs
- 8) ASSEMBLE D3693-1 WITH D3691-1 USING SIKAFLEX-241/291 OR PROSEAL 890 OR MIL-S-8802 CLASS 'B2' SEALANT BETWEEN MATING SURFACES. ENSURE HOLES FOR AN3C BOLTS ARE CLEAR OF SEALANT

DESIGN	RF	DART AEROSPACE LTD HAWKESBURY, ONTARIO, CANADA	
DRAWN	RF		
CHECKED	<i>[Signature]</i>	DRAWING NO. D3684	REV. C
MFG. APPR.	<i>[Signature]</i>		SHEET 3 OF 5
APPROVED	<i>[Signature]</i>	TITLE TRIPOD MOUNT ASSY	SCALE NTS
DE APPR.	<i>[Signature]</i>	<small>COPYRIGHT © 2008 BY DART AEROSPACE LTD THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSES OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD</small>	
DATE	08.12.15		

ITEM	QTY .047	PART NUMBER	DESCRIPTION
1	X	D3684-047	FWD LEG ASSEMBLY
2	1	D3688-1	STUD
3	1	D3689-1	SLEEVE
4	1	D3691-1	STUD
5	4	D3692-1	SPACER
6	1	D3693-1	ROD END BEARING
7	2	AN3C-12A	BOLT
8	2	MS21043-3	NUT
9	1	NAS509L-12C	NUT
10	1	NAS509-12C	NUT

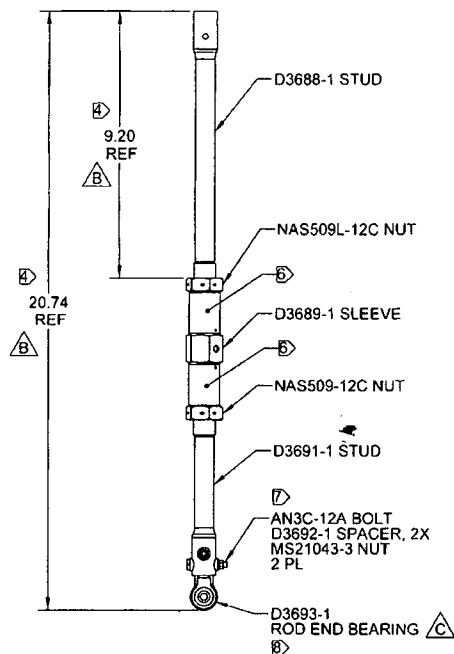





W1050729


RELEASED
09/01/12

NOTES:

- 1) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED
- 2) UNITS: INCHES UNLESS OTHERWISE NOTED
- 3) IDENTIFICATION: NONE
- 4) DIMENSION SHOWN IS WHEN D3688-1 & D3691-1 STUDS ARE FULLY THREADED INTO D3689-1 SLEEVE
- 5) WEIGHT: 3.10 lbs
- 6) USE TECTYL 502C CLASS I, MIL-PRF-16173E GRADE 2 OR EQUIVALENT ANTI-SEIZE COMPOUND ON THREAD
- 7) TORQUE FASTENERS TO 20-25 in-lbs
- 8) ASSEMBLE D3693-1 WITH D3691-1 USING SIKAFLEX-241/-291 OR PROSEAL 890 OR MIL-S-8802 CLASS 'B2' SEALANT BETWEEN MATING SURFACES. ENSURE HOLES FOR AN3C BOLTS ARE CLEAR OF SEALANT

DESIGN	RF	DART AEROSPACE LTD	
DRAWN	RF	HAWKESBURY, ONTARIO, CANADA	
CHECKED		DRAWING NO.	REV. C
MFG. APPR.		D3684	SHEET 4 OF 5
APPROVED		TITLE	SCALE
DE APPR.		TRIPOD MOUNT ASSY	NTS
DATE	08.12.15	COPYRIGHT © 2008 BY DART AEROSPACE LTD	
THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL. NO DISSEMINATION OR REPRODUCTION OF THIS DOCUMENT IS PERMITTED WITHOUT THE WRITTEN PERMISSION OF DART AEROSPACE LTD.			

ITEM	QTY -049	PART NUMBER	DESCRIPTION
1	X	D3684-049	AFT LEG ASSEMBLY
2	1	D3688-3	STUD
3	1	D3689-1	SLEEVE
4	1	D3691-1	STUD
5	4	D3692-1	SPACER
6	1	D3693-1	ROD END BEARING
7	2	AN3C-12A	BOLT
8	2	MS21043-3	NUT
9	1	NAS509L-12C	NUT
10	1	NAS509-12C	NUT

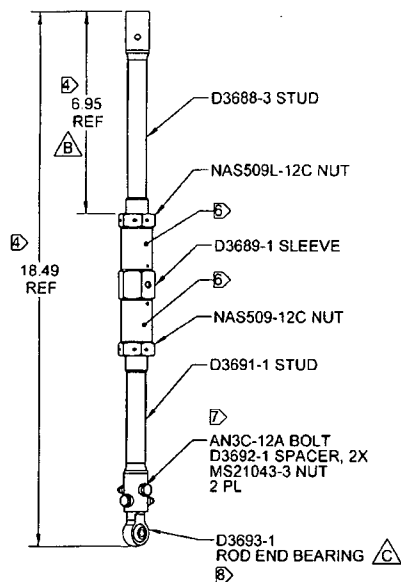

D3684-049 AFT LEG ASSEMBLY

NOTES:

- 1) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED
- 2) UNITS: INCHES UNLESS OTHERWISE NOTED
- 3) IDENTIFICATION: NONE
- 4) DIMENSION SHOWN IS WHEN D3688-3 & D3691-1 STUDS ARE FULLY THREADED INTO D3689-1 SLEEVE
- 5) WEIGHT: 2.88 lbs
- 6) USE TECTYL 502C CLASS I, MIL-PRF-16173E GRADE 2 OR EQUIVALENT ANTI-SEIZE COMPOUND ON THREAD
- 7) TORQUE FASTENERS TO 20-25 in-lbs
- 8) ASSEMBLE D3693-1 WITH D3691-1 USING SIKAFLEX-241/291 OR PROSEAL 890 OR MIL-S-8802 CLASS 'B2' SEALANT BETWEEN MATING SURFACES. ENSURE HOLES FOR AN3C BOLTS ARE CLEAR OF SEALANT

RELEASED
09/01/12 ML

DESIGN	RF	DART AEROSPACE LTD HAWKESBURY, ONTARIO, CANADA	
DRAWN	RF		
CHECKED	RF	DRAWING NO. D3684	REV. C
MFG. APPR.			SHEET 5 OF 5
APPROVED		TITLE	SCALE
DE APPR.		TRIPOD MOUNT ASSY	NTS
DATE	08.12.15	COPYRIGHT © 2008 BY DART AEROSPACE LTD THIS DOCUMENT IS PRIVATE AND NOT BE RELEASED OR DISCLOSED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD	

W10 50729